


INSTRUCTION MANUAL

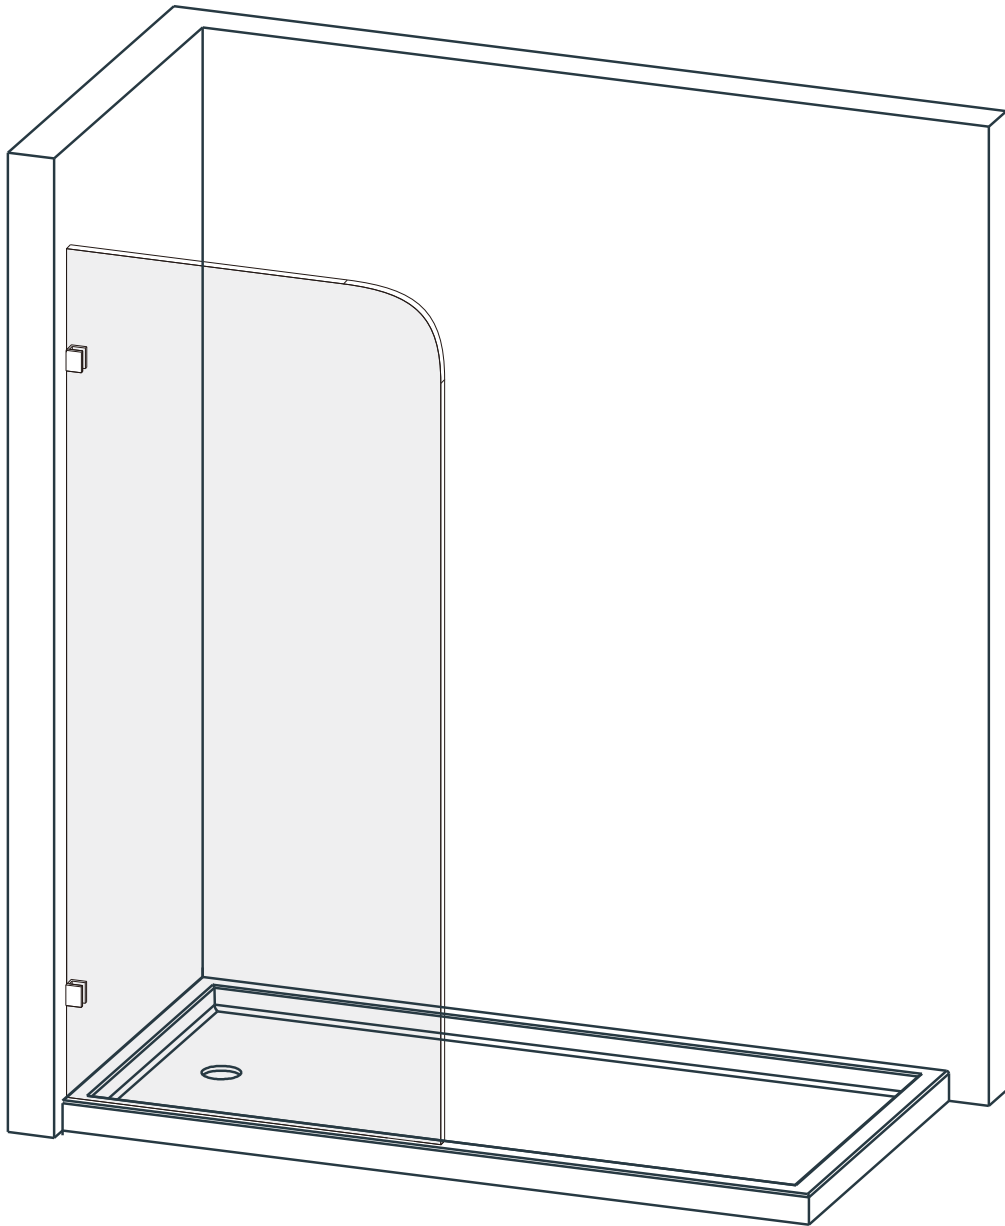

2 PEOPLE REQUIRED

***Please keep this manual and product code number for future reference
and for ordering replacement parts if necessary.***

GENERAL INSTRUCTIONS

- Read this manual carefully and completely before proceeding.
- It is recommended that you wear safety glasses at all times during the installation.

INSTALLATION OVER CERAMIC TILES

- If your shower door is to be installed over ceramic tiles, the tiles should lay completely under the wall jamb.
- Silicone should be used to seal the gap where the ceramic tiles meet the fixed panel.

NOTICE

- Caulking: no sealant is required inside the shower, unless otherwise stated.
- Some models are equipped with clear sealing gaskets.











CARE FOR YOUR SHOWER DOOR

- Never use scouring powder pads or sharp instruments on metal pieces or glass panels.

An occasional wiping down with a mild soap diluted in water is all that is needed to keep the panels and aluminum parts looking new.



- We recommend wiping the glass panels with a squeegee after each use.

TOOLS REQUIRED


				
SPIRIT LEVEL	POWER DRILL	PENCIL	SILICONE	MALLET
				
TAPE MEASURE	SCREW DRIVER	6mm&3mm(1/4" & 1/8") DRILL BITS	HACKSAW	SAFETY GLASSES



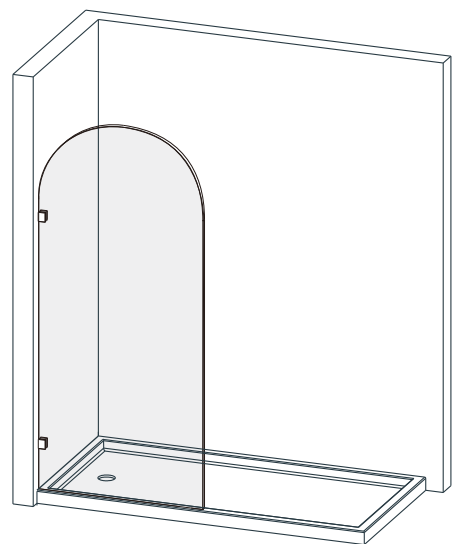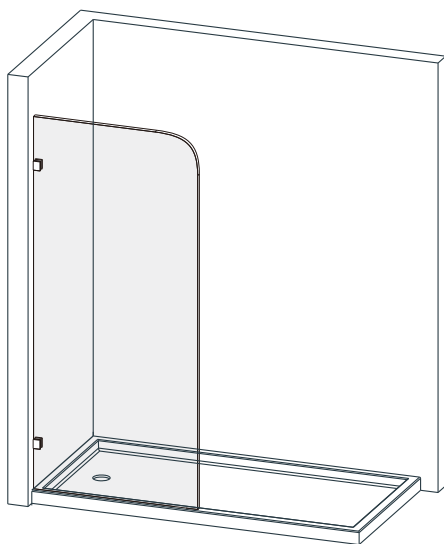

* Use a 6mm($\frac{1}{4}$ ") drill bit for ceramic when drilling into ceramic tiles

CHOOSE A CONFIGURATION

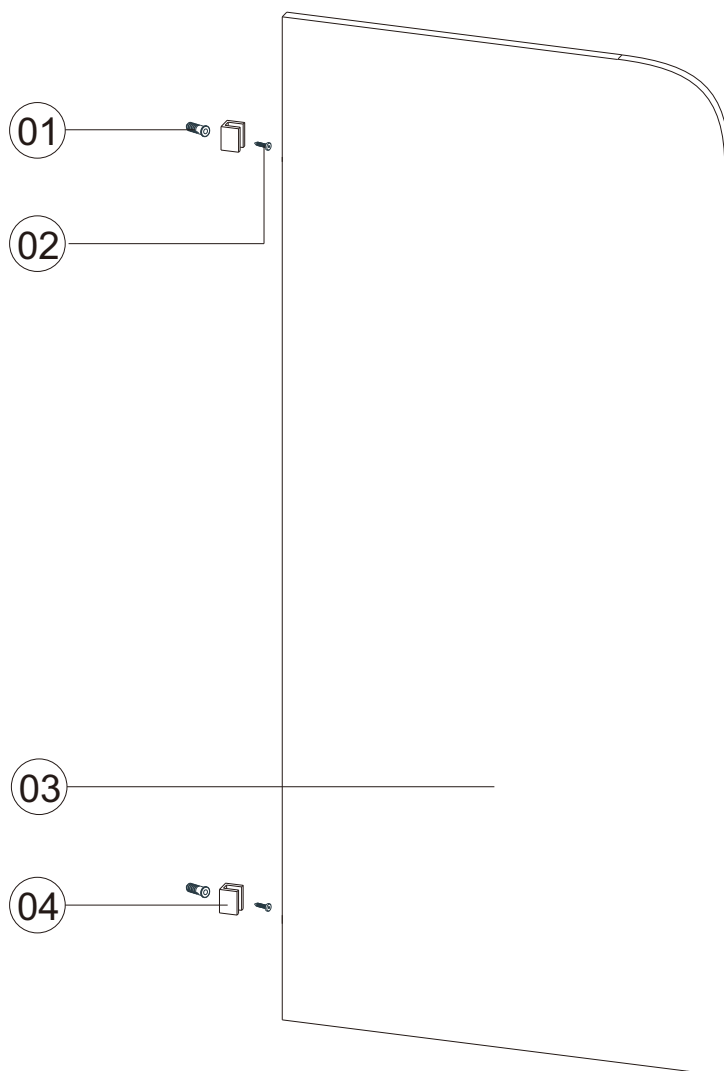


PARTS LISTING




ITEM	PARTS	DIAGRAM	QTY
01	Wall plug		3
02	Screw ST4x30		3
03	Fixed glass		1
04	U Bracket		2



1

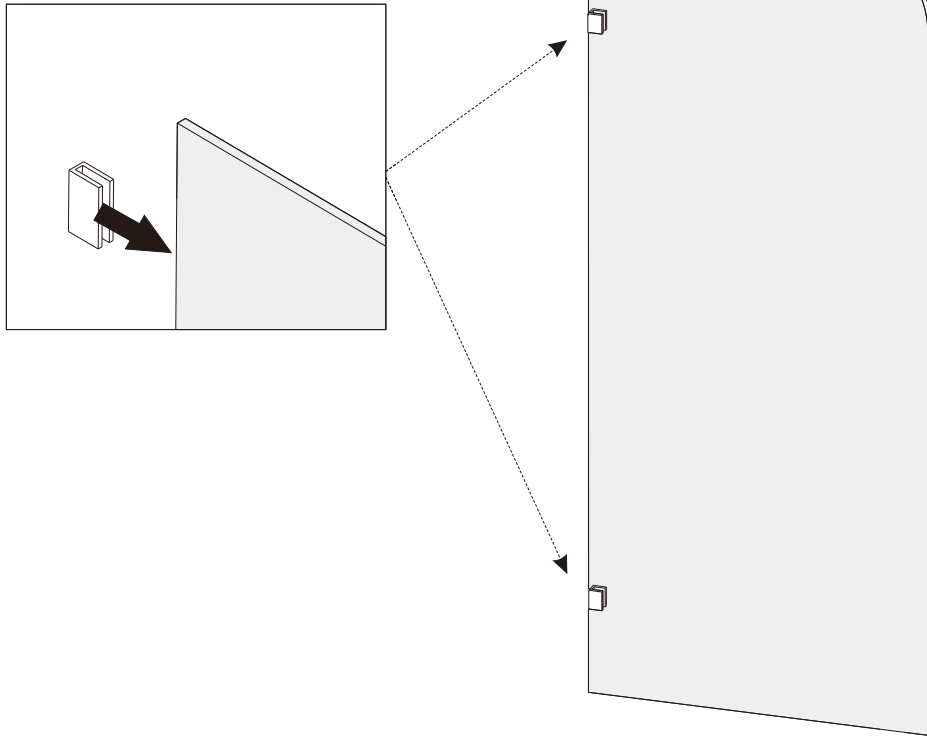


2

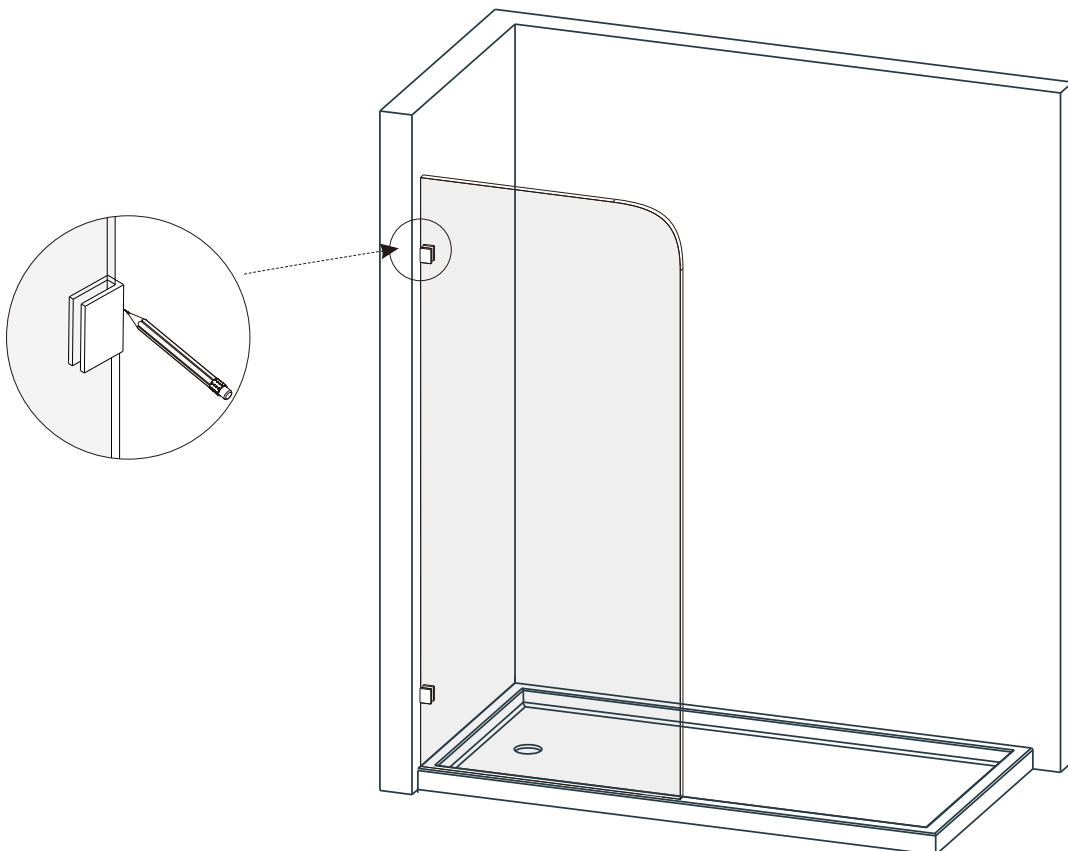


3

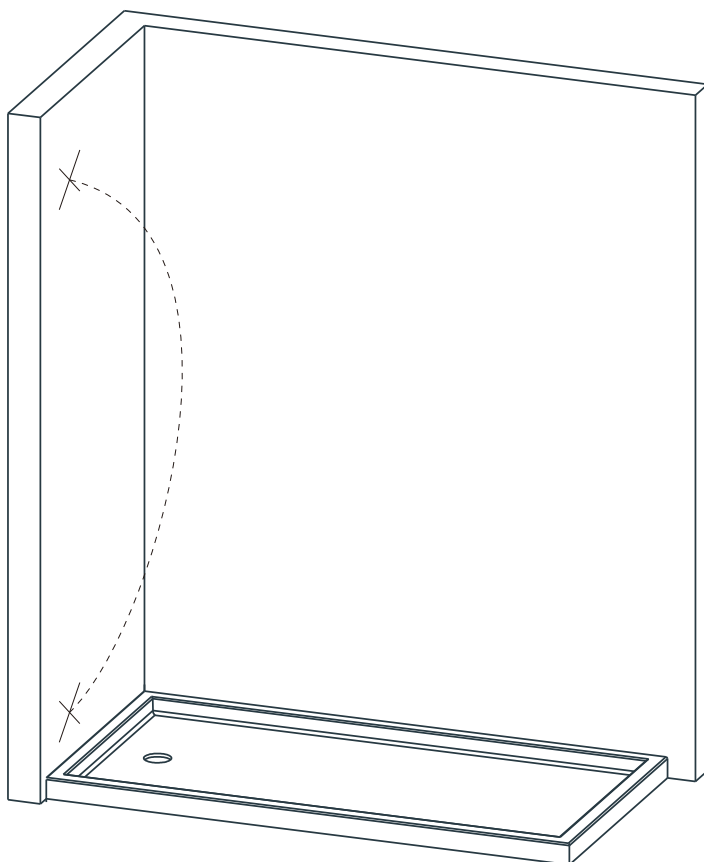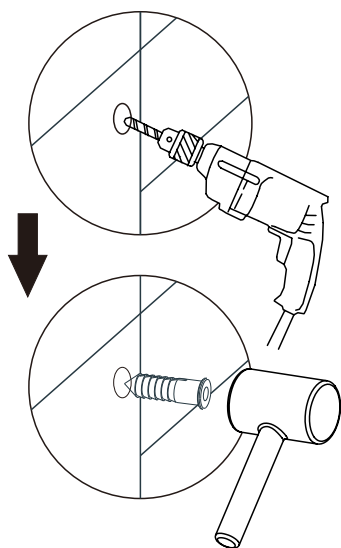


4

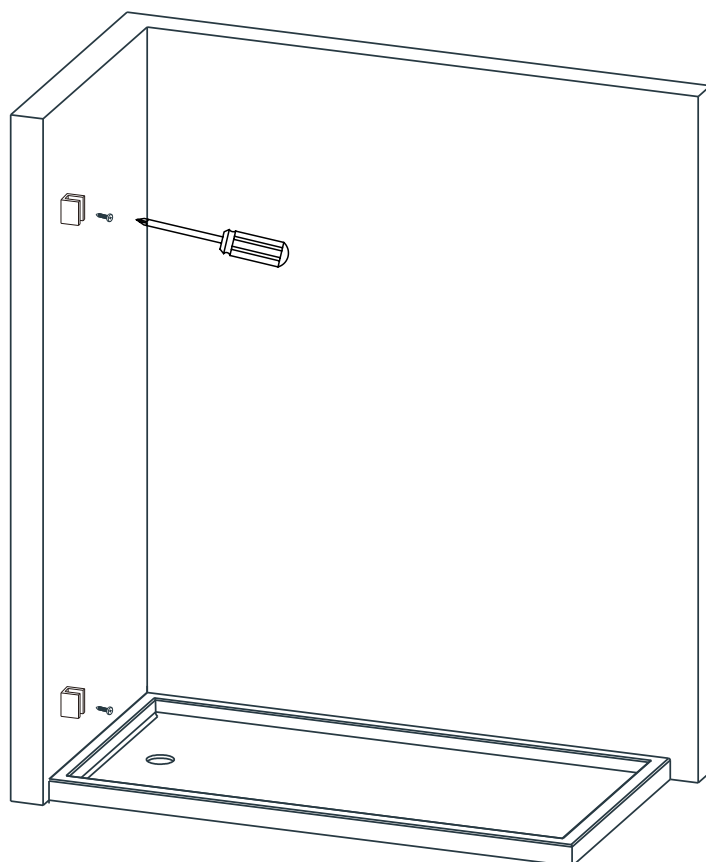

5

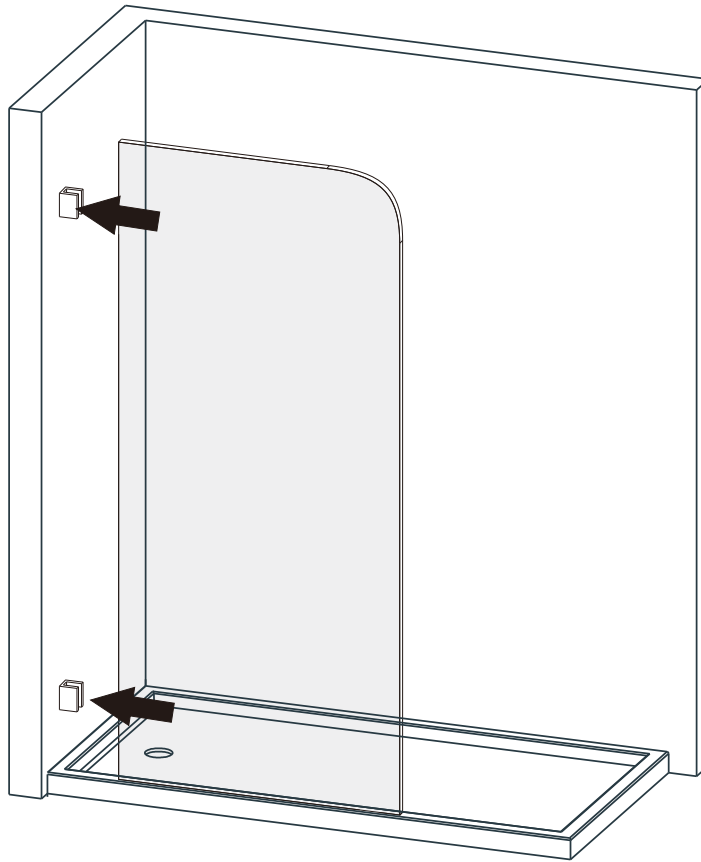

6

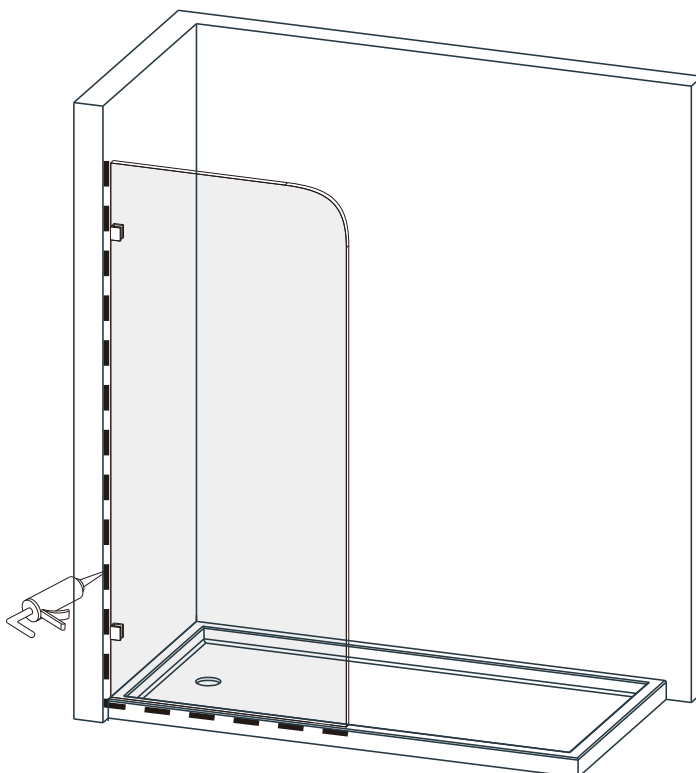

24 HOURS

