
INSTRUCTION MANUAL



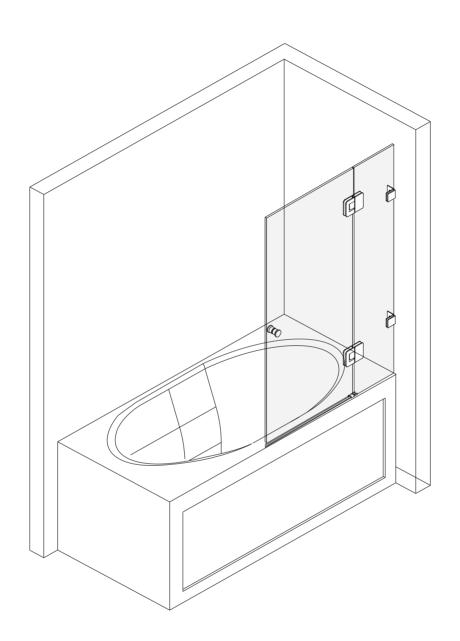

Please keep this manual and product code number for future reference and for ordering replacement parts if necessary.

GENERAL INSTRUCTIONS

- · Read this manual carefully and completely before proceeding.
- It is recommended that you wear safety glasses at all times during the installation.

INSTALLATION OVER CERAMIC TILES

- If your shower door is to be installed over ceramic tiles, the tiles should lay completely under the wall jamb.
- Silicone should be used to seal the gap where the ceramic tiles meet the fixed panel.

NOTICE

- Caulking: no sealant is required inside the shower, unless otherwise stated.
- Some models are equipped with clear sealing gaskets.

CARE FOR YOUR SHOWER DOOR


- Never use scouring powder pads or sharp instruments on metal pieces or glass panels.
 - An occasional wiping down with a mild soap diluted in water is all that is needed to keep the panels and aluminum parts looking new.
- We recommend wiping the glass panels with a squeegee after each use.

TOOLS REQUIRED


SPIRIT LEVEL	POWER DRILL	PENCIL	SILICONE	MALLET
TAPE MEASURE	SCREW DRIVER	6mm&3mm(1/4" & 1/8") DRILL BITS	HACKSAW	SAFETY GLASSES

 $[\]mbox{\ensuremath{\mbox{\$}}}$ Use a 6mm(1/4") drill bit for ceramic when drilling into ceramic tiles

CHOOSE A CONFIGURATION





PARTS LISTING

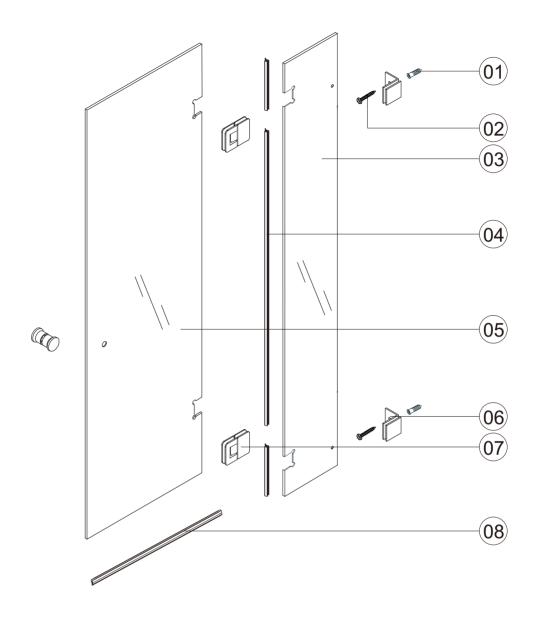



ITEM	PARTS	DIAGRAM	QTY
01	Wall plug	1	2
02	Screw ST4x30		2
03	Fixed glass		1
04	"Y"Seal with soft leg		1


ITEM	PARTS	DIAGRAM	QTY
05	Door glass		1
06	Corner code	ð	2
07	Hinge seal	Œ	2
08	Door sweep		1

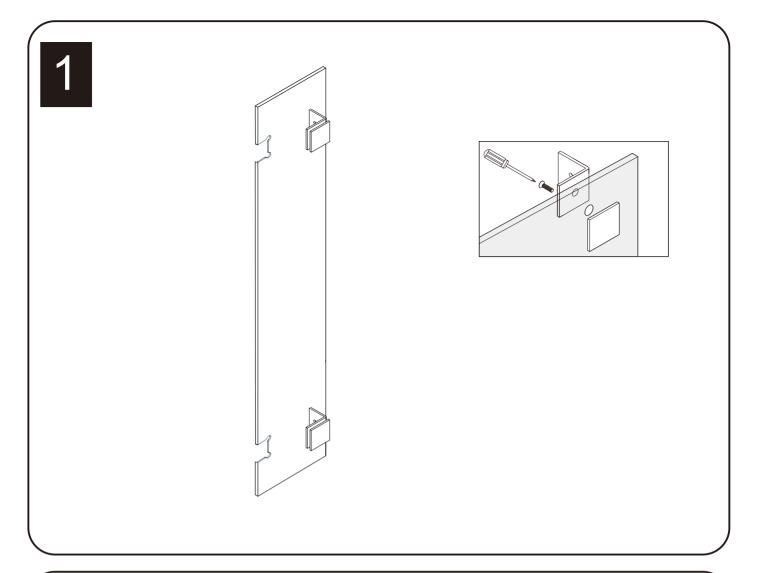

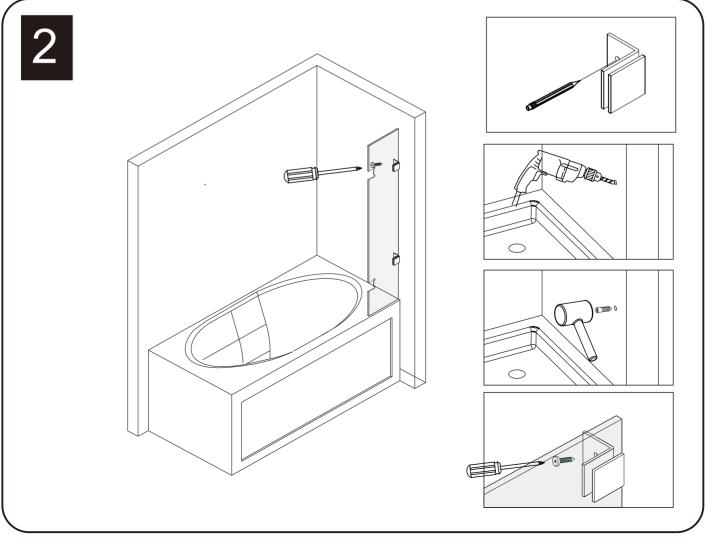

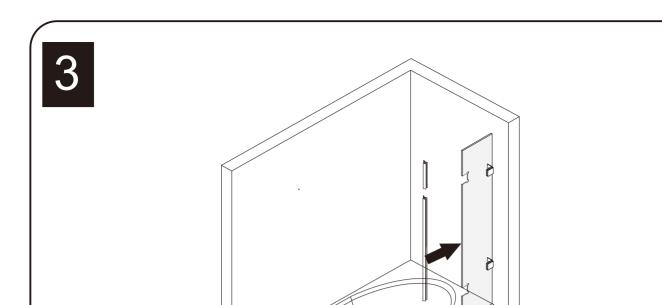

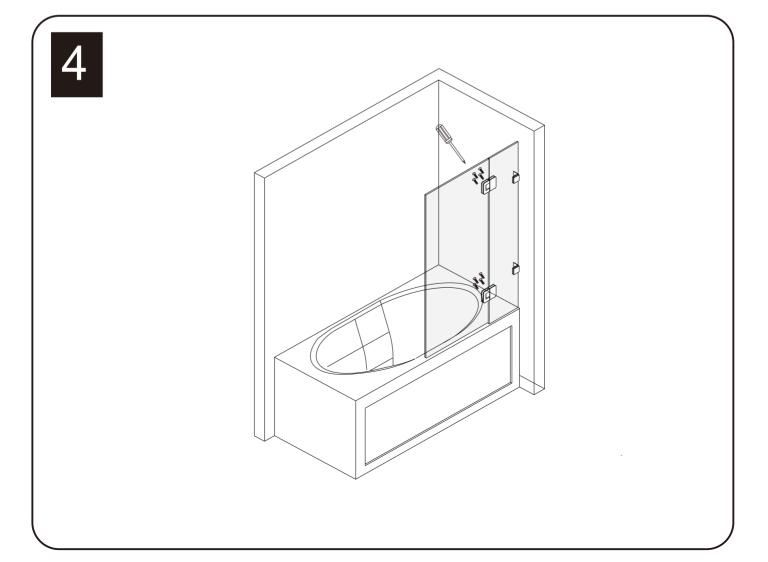

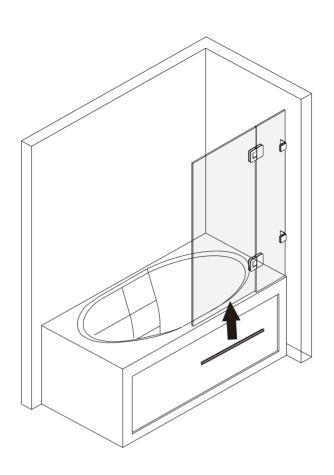

24 HOURS